

Octopus

The Octopus "T" models:

1850T, 2340T, 2830T



Standard configuration listed below.
Please contact your sales representative for additional options.

Structure

Steel frame

Performance

Speed:

30-50 rpm

Loads Per Hour:

Up to 150 loads per hour depending on load size, conveyor speed and wrap pattern

Maximum Load Size:

1000 mm W x 1460 mm L (1850T)

1500 mm W x 1690 mm L (2340T)

1500 mm W x 1690 mm L (2830T)

Note: Maximum load size depends on the width and length combination.

Please contact us for more information.

Maximum Load Weight:

Dependent on conveyor

Shipping Information

Dimensions:

3520 mm L x 2470 mm W x 2680 mm H (1850T)

4050 mm L x 2990 mm W x 2680 mm H (2340T)

4550 mm L x 3490 mm W x 2680 mm H (2830T)

Machine Weight:

2650 kg (1850T)

2750 kg (2340T)

3450 kg (2830T)

Film Delivery System

Film Capacity:

500 mm W x 250 mm Dia.

Film Tension:

Tacho Feedback

Tension Control:

Variable pre-programmed tension levels

Film Threading:

Easy-S film carriage

Cut & Seal:

Impulse heated ribbon cutting and No Touch-No Tail (NT²) seaming

Air & Power Requirements

Power:

3 x 380 VAC / 50 Hz

3 x 400 VAC / 50 Hz

3 x 415 VAC / 50Hz

Pneumatics:

0.6 MPa, max 9 l / cycle

Optional Equipment

Safety fence with electrical lockout switch

Integrated top sheet dispenser

Load stabilizer

Pallet lift device


Roping device

Reel Change System (RCS)

Conveyors

OctoMAX™

And many more . . .

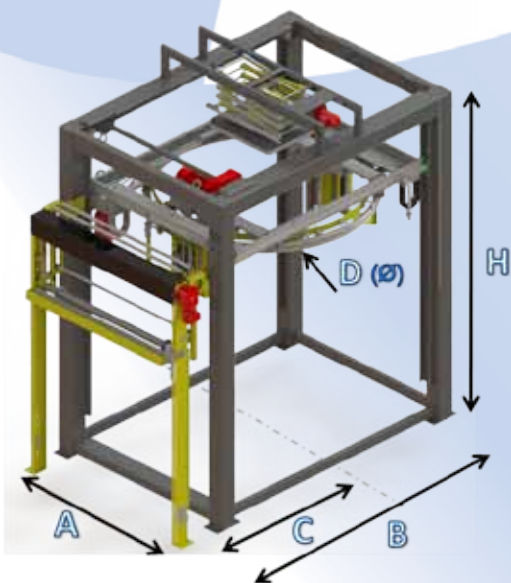

Machine Dimensions / mm

MODEL	B	C	D	A	H
1850T	3367	1837	2470	2380	*
2340T	4006	2049	2990	2880	*
2830T	4367	2340	3490	3380	*

* Depends on the pallet and conveyor height.